



RJ11(HOOK UNDERNEATH)



PARTICULARS	RJ11 CONN. PIN No.	DB9(M)CONN. Pin No.	Colour of Wire
Tx	2	2	BLACK
Rx	3	3	RED
GND	4	5	GREEN
VCC	5	9	YELLOW

pin 4 & 6 must be short of DB9-pin connector
 pin 7 & 8 must be short of DB9-pin connector
 Shield has to be connected with pin 5 (of 9-pin connector)

RJ11 PLUG(HOOK UNDERNEATH)

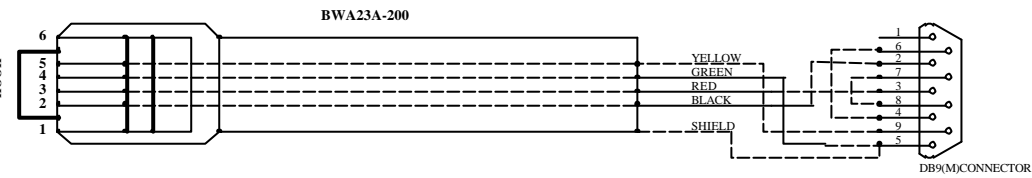

TITLE: WIRING DIAGRAM FOR PACT TO 9M FOR ECD-100 (FOR GSM MODEM)		Sheet 1 of 1		CUSTOMER:	R01	25/05/2005	BHW204-303 TO BE REPLACED BY BWA23A-200 (REA 102677)	KSP	KSP	SNG
DOC.NO. RCM002-211	HARDWARE DEPARTMENT	ESL-HW-QF-11	SCALE :	This document is the property of ENTITY SOLUTIONS LIMITED and shall not be divulged, revealed, re-produced, copied, in whole or in part, nor used for any purpose other than for the one submitted. Ask, if any doubt.	R00	22/07/2004	New Document Release (DRN 966)	GPM	VIB	PJ
	Circuit Diagram/Wiring Diagram/ End Component Layout	Rev.No.00	Size (Org.)		Rev.No.	Date	REVISION HISTORY (REA/DRN)	DRN. BY	CHD. BY	APP BY.